

ISUB BMW 8

Technical Sheet

Subwoofer





SPECIFICATIONS

Nominal power	90 W	
Maximum power	180 W	
Sensitivity	89 dB	
Nom. impedance	8 Ω	
Cone	Paper	
Surround	Butyl	
DC resistance	6.6 Ω	
VC diameter	50mm	2"
Former	Aluminium	
Layers	2	
Wire	Copper	
Net weight	990g	2.18 lbs
Frequency reponse	35-200 Hz	

MECHANICAL DRAWING

Dimensions in mm

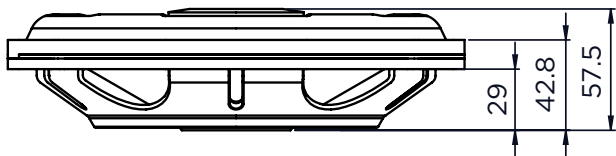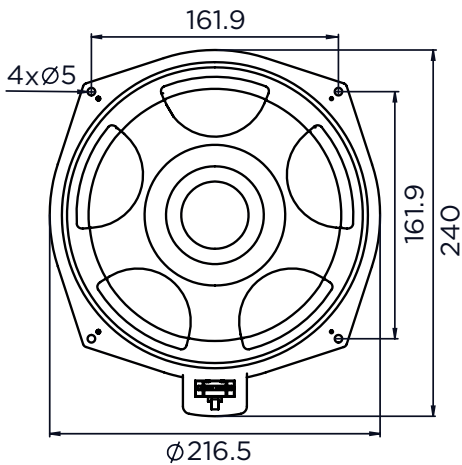


PARAMETERS

Rdc	6.6 Ω
Fs	40 Hz
Mms	40 g
Cms	0.3 mm/N
Vas	18 l
Qts	0.65
Qes	0.9
Qms	3
Bxl	9.2 N/A
Sd	213 cm ²
SPL	84 dB
Xmax	6.5 mm

ISUB BMW 8

Product sheet

The ISUB BMW 8 subwoofer delivers powerful bass, notably thanks to its high-performance neodymium motor. With the integrated spacer in the chassis, the product's integration into your vehicle's original locations is quick and easy. With an impedance of 8 ohms, this subwoofer is ideal for enhancing the experience in BMW and MINI models equipped with an audio option.

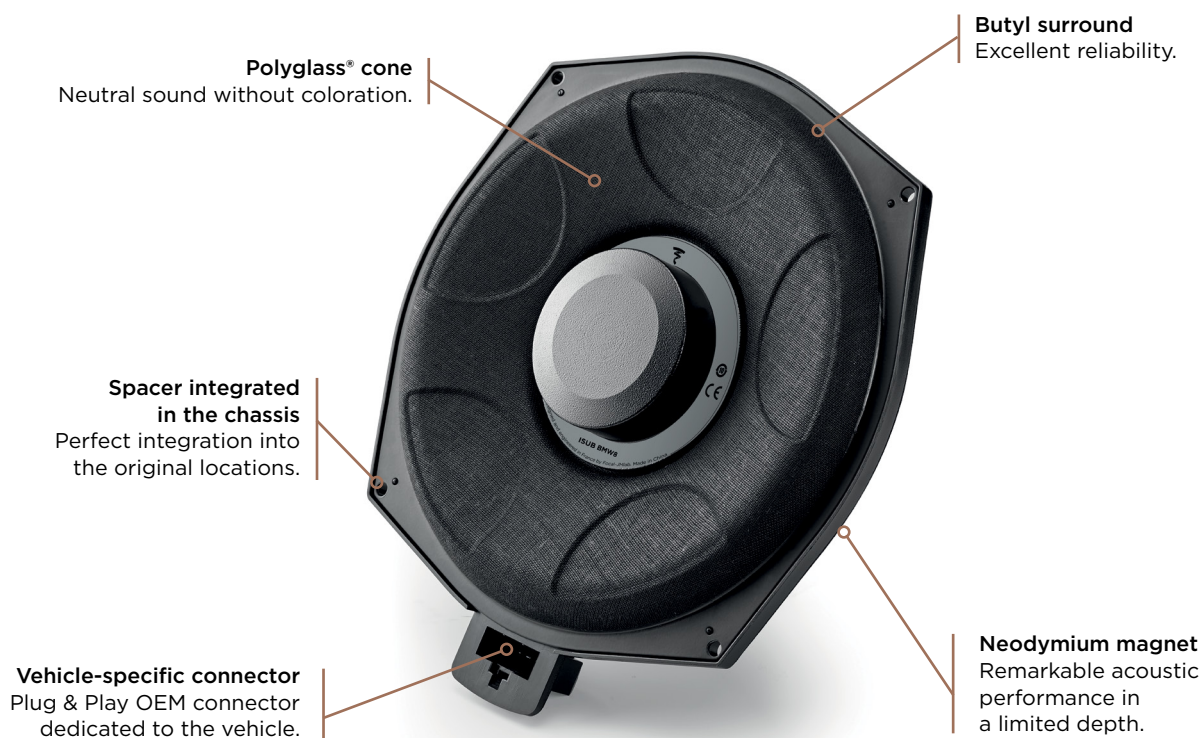

Key points

- Developed in France by Focal
- Simple and quick installation. No modification within the vehicle
- Invisible integration in the vehicle's interior
- Superior sound quality
- Installation video tutorial available on **focal-inside.com** and youtube.com

Check your car compatibility on **www.focal-inside.com**



Type	Subwoofer
Woofers	8" (200mm)
Magnet	Neodymium
Cone	Polyglass
Surround	Butyl
Impedance	8Ω
Max. power	180W
Nom. power	90W RMS
Sensitivity (2.83V/1m)	89dB
Frequency response	35Hz - 200Hz

FOCAL® INSIDE

Focal® is a trademark of Focal-JMLab® - www.focal.com - SCBC - 18/04/2024 - v1

FOCAL®